

50040 STRAIGHT CONNECTOR

Материал Brass/PVC/1.0619

Налягане PN 20


Размер Ø3,0 - Ø14,0 mm

APPLICATIONS

- Pneumatic automation
- Automotive
- Textile, Packaging
- Compressed Air Circuit
- Vacuum

VARIANTS AND ADVANTAGES

- Quick connection and disconnection
- Full Flow and Vacuum resistant tank to special shaped seals
- threads available:
 - BSPP
 - BSPT (universal short)
 - Metric
- Metal Robustness
- Wide Range
- Silicon Free

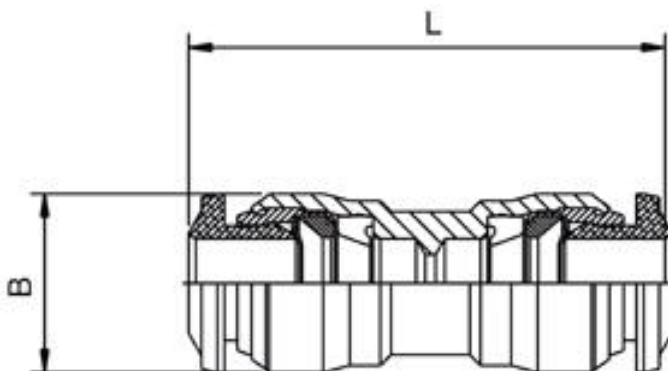

No.	Parts	Material
1	Body	Nickel-plated brass
2	Rings	Acetalic resin
3	Capsule	Nickel-plated brass Capsule
4	Clamping washer	Steel AISI 301
5	Position ring	Technopolymeric
6	Molded seal	NBR
7	Thread packing	NBR
8	Threaded base	Nickel Plated Brass
9	Seeger	Seeger
10	Seal	NBR

Specifications	
Standards Reference:	ROHS 2011/65/CE
	PED 2014/68/UE
	ISO 14743:2004
	Sillicon free
Size:	Ø3,0 - Ø14,0 mm

Code	Ø tube	Ø tube2	L	B	Bag
------	--------	---------	---	---	-----

50040 STRAIGHT CONNECTOR

Материал Brass/PVC/1.0619

Налягане PN 20

Размер Ø3,0 - Ø14,0 mm

Code	Ø tube	Ø tube2	L	B	Bag
5004000009	3	3	26	8.5	10
5004000001	4	4	30.5	10.5	10
5004000008	5	5	33	11.5	10
5004000002	6	4	32	12.5	10
5004000003	6	6	34	12.5	10
5004000004	8	6	35	14.5	10
5004000005	8	8	36	14.5	10
5004000011	10	8	40.5	17.5	10
5004000006	10	10	42	17.5	10
5004000012	12	10	45.5	20.5	10
5004000007	12	12	47	20.5	10
5004000010	14	14	49	21.5	10