

50625 DOUBLE JOINT

Материал Brass/PVC/1.0619

Налягане PN 20


Размер Ø4,0 - Ø16,0 mm

APPLICATIONS

- Pneumatic automation
- Automotive
- Textile, Packaging
- Compressed Air Circuit
- Vacuum

VARIANTS AND ADVANTAGES

- Quick connection and disconnection
- Full Flow and Vacuum resistant tank to special shaped seals
- threads available:
 - BSPP
 - BSPT (universal short)
 - Metric
- Metal Robustness
- Wide Range
- Silicon Free

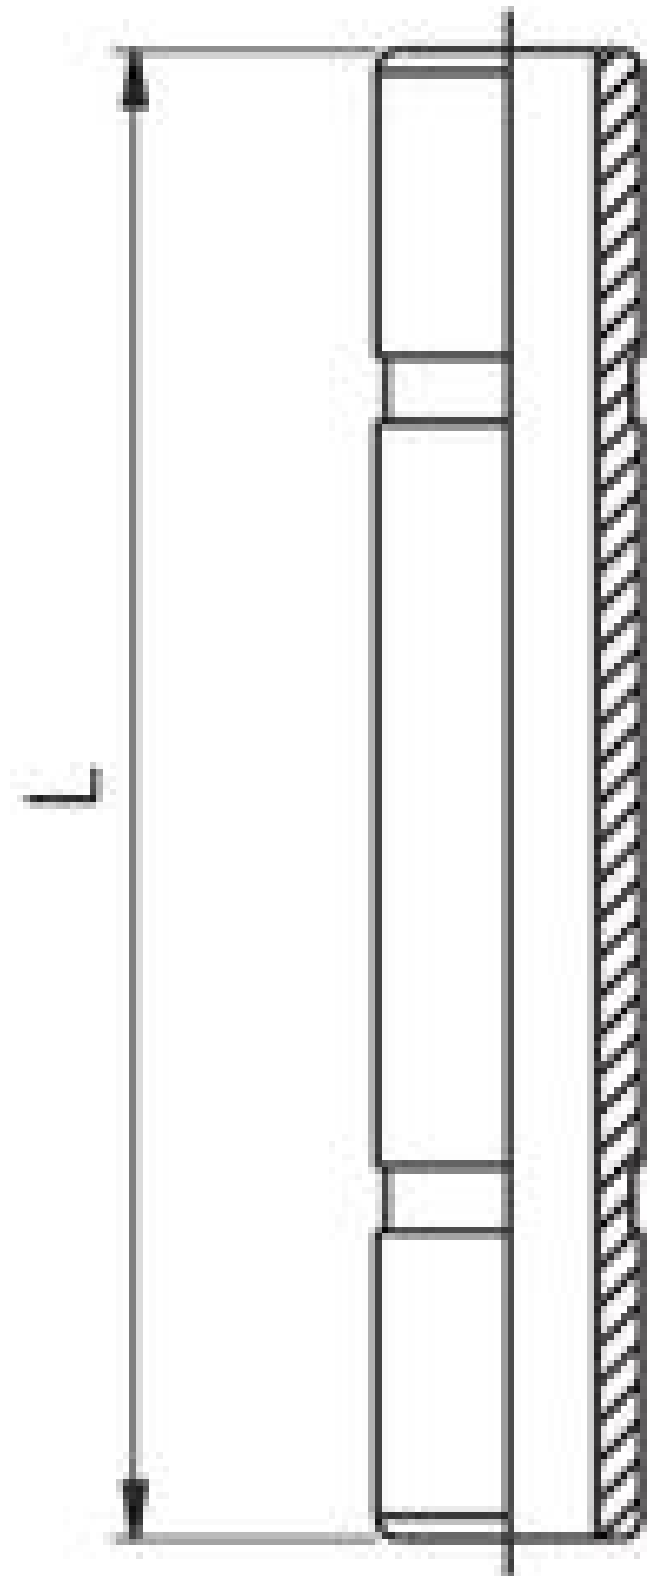

50625 DOUBLE JOINT

Материал Brass/PVC/1.0619

Налягане PN 20

Размер Ø4,0 - Ø16,0 mm

No.	Parts	Material
1	Body	Nickel-plated brass

Specifications	
Standards Reference:	ROHS 2011/65/CE
	PED 2014/68/UE
	ISO 14743:2004
	Sillicon free
Size:	Ø4,0 - Ø16,0 mm

Specifications	
Standards Reference:	ROHS 2011/65/CE
	PED 2014/68/UE
	ISO 14743:2004
	Sillicon free
Size:	Ø4,0 - Ø16,0 mm