

## 55315 CONNECTOR "Y" (PLUG-IN)

Материал Brass/PVC/1.0619

Налягане PN 20


Размер Ø4,0 - Ø12,0 mm

### APPLICATIONS

- Pneumatic automation
- Automotive
- Textile, Packaging
- Compressed Air Circuit
- Vacuum

### VARIANTS AND ADVANTAGES

- Quick connection and disconnection
- Full Flow and Vacuum resistant tank to special shaped seals
- 3 threads available:
  - BSPP
  - BSPT (universal short)
  - Metric
- Metal Robustness
- Wide Range
- Silicon Free

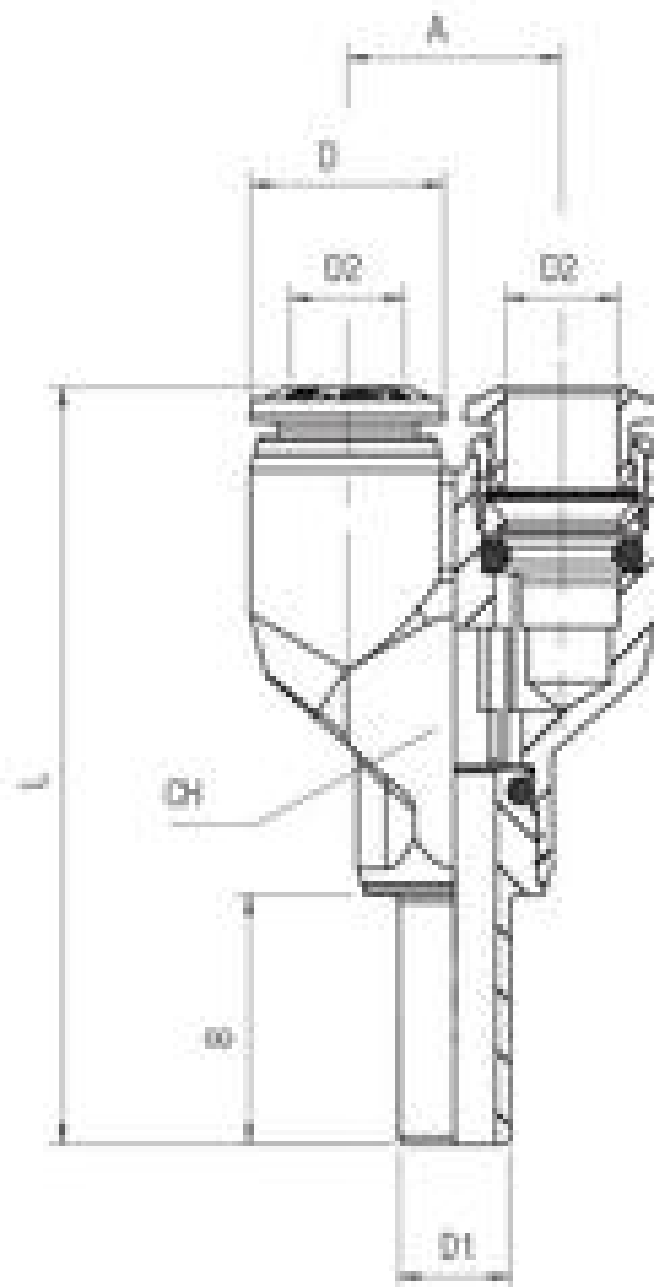

## 55315 CONNECTOR "Y" (PLUG-IN)

Материал Brass/PVC/1.0619

Налягане PN 20

Размер Ø4,0 - Ø12,0 mm

No.	Parts	Material
1	Body	Nickel-plated brass
2	Rings	Acetalic resin
3	Capsule	Nickel-plated brass Capsule
4	Clamping washer	Steel AISI 301
5	Position ring	Technopolymeric
6	Molded seal	NBR
7	Thread packing	NBR
8	Threaded base	Nickel Plated Brass
9	Seeger	Seeger
10	Seal	NBR

Specifications	
Standards Reference:	ROHS 2011/65/CE
	PED 2014/68/UE
	ISO 14743:2004
	Sillicon free
Tube diameter:	4,0 - 12,0 mm

Code	D1	D2	A	L	Ch	D	B	Bag
5531500002	4	4	11	43	10	10	15	10
5531500008	6	4	13.5	49.5	12	12.5	17	10
5531500004	6	6	13.5	50	12	12.5	17	10
5531500009	8	6	15.5	55	14	12.5	18	10
5531500005	8	8	15.5	55	14	14	18	10
5531500010	10	8	19	65	17	17	22	10
5531500006	10	10	19	65.5	17	17	22	10
5531500007	12	12	22	78	20	20	24.5	10