

# BRONZE VALVE ANGLE FLANGED JIS F7334H 5K

Материал bronze CC491K; DIN RG5

Налягане 5K

Размер DN15-65

## DESCRIPTION

Fire hydrant valve angle type is used in fresh water and sea water systems for multiturn operation, to be fitted with fire coupling for connecting fire hose. Angled type with bolted bonnet. Soft disc sealing.

### Media


- Sea water
- Fresh water

### APPLICATION

- For fire fighting systems. Max. temperature 80°C.

### CONNECTION

- Standard hose coupling NAKADJIMA

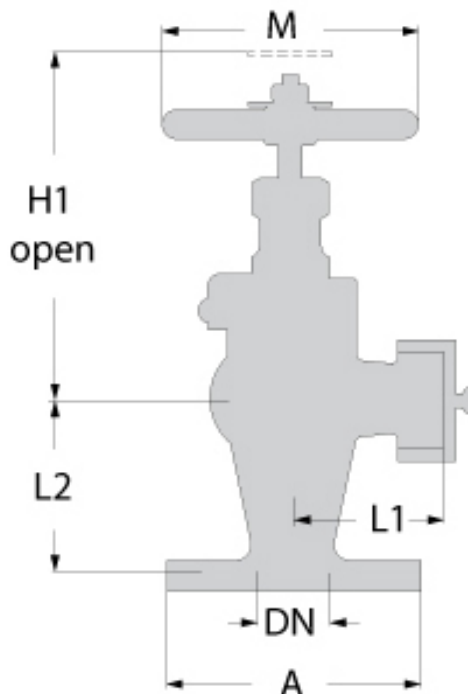

No.	Part	Material
1	Body	Bronze CC491K (RG5)
2	Disc ring	NBR bonded aramid
3	Disc	Bronze CC491K (RG5)
4	Bonnet	Bronze CC491K (RG5)
5	Stem	Special brass CW710R (SoMs59)
6	Handwheel	Cast Iron EN-JL1030

Specifications	
Standart:	JIS 7334H
Execution:	Straight
Connection type:	Flanged
Operation:	Manual / Handwheel
Actuation:	Multiturn

**BRONZE VALVE ANGLE FLANGED JIS F7334H  
5K**

Материал bronze CC491K; DIN RG5

Налягане 5K

Размер DN15-65

<b>Specifications</b>	
Tmax:	NBR seat 80 °C / EPDM seat 110 °C

<b>Dn</b>	<b>A</b>	<b>L</b>	<b>H (open)</b>	<b>M</b>
15	80	55	120	80
25	95	65	145	125
40	120	75	165	140
50	130	100	255/240	160
65	-	-	255	200