

# BRONZE VALVE STRAIGHT FLANGED JIS F7334 10K

Материал bronze CC491K; DIN RG5

Налягане 10K

Размер DN15-65

## DESCRIPTION

Fire hydrant valve straight type is used in fresh water and sea water systems for multiturn operation, to be fitted with fire coupling for connecting fire hose. Angled type with bolted bonnet. Soft disc sealing.

### Media


- Sea water
- Fresh water

### APPLICATION

- For fire fighting systems. Max. temperature 80°C.

### CONNECTION

- Standard hose coupling NAKADJIMA

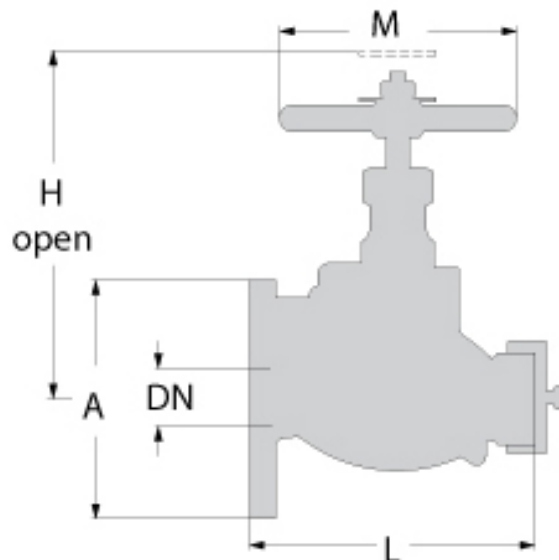

Dn	A	L	H (open)	M
15	80	110	130	80
25	95	125	160	125
DN	A	L	H (open)	M
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200

Specifications	
Standart:	JIS 7334R
Execution:	Straight
Connection type:	Flanged
Operation:	Manual / Handwheel
Actuation:	Multiturn
Tmax:	NBR seat 80 °C / EPDM seat 110 °C

**BRONZE VALVE STRAIGHT FLANGED JIS  
F7334 10K**

Материал bronze CC491K; DIN RG5

Налягане 10K

Размер DN15-65

<b>Dn</b>	<b>A</b>	<b>L</b>	<b>H (open)</b>	<b>M</b>
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200