

# BRONZE VALVE STRAIGHT FLANGED JIS F7334 5K

Материал bronze CC491K; DIN RG5

Налягане 5K

Размер DN15-65

## DESCRIPTION

Fire hydrant valve straight type is used in fresh water and sea water systems for multiturn operation, to be fitted with fire coupling for connecting fire hose. Angled type with bolted bonnet. Soft disc sealing.

### Media


- Sea water
- Fresh water

### APPLICATION

- For fire fighting systems. Max. temperature 80°C.

### CONNECTION

- Standard hose coupling NAKADJIMA

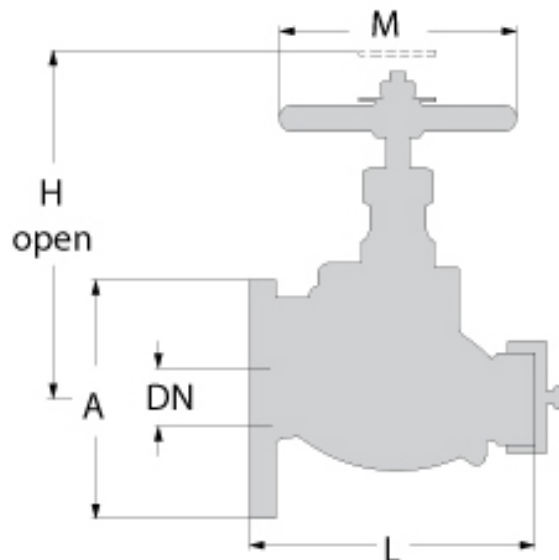

No.	Part	Material
1	Body	Bronze CC491K (RG5)
2	Disc ring	NBR bonded aramid
3	Disc	Bronze CC491K (RG5)
4	Bonnet	Bronze CC491K (RG5)
5	Stem	Special brass CW710R (SoMs59)
6	Handwheel	Cast Iron EN-JL1030

Specifications	
Standart:	JIS 7334R
Execution:	Straight
Connection type:	Flanged
Operation:	Manual / Handwheel
Actuation:	Multiturn
Tmax:	NBR seat 80 °C / EPDM seat 110 °C

Dn	A	L	H (open)	M
----	---	---	----------	---

**BRONZE VALVE STRAIGHT FLANGED JIS  
F7334 5K**

Материал bronze CC491K; DIN RG5  
 Налягане 5K  
 Размер DN15-65

<b>Dn</b>	<b>A</b>	<b>L</b>	<b>H (open)</b>	<b>M</b>
15	80	110	130	80
25	95	125	160	125
40	120	160	190	140
50	130	210	255/270	160
65	-	-	295	200