


# BUTTERFLY VALVE TYPE LUG DIN PN 16

Материал EN-JL1030; DIN GGG40

Налягане PN 16

Размер DN-40-200

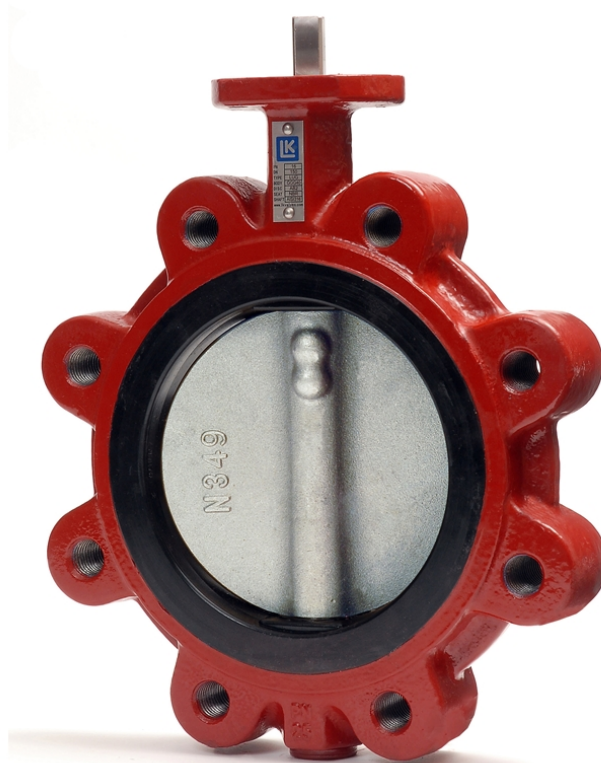

No.	Part	Material
1	Body	Nodular Iron EN-JL1030 (GGG40)
2	Disc	St. steel 1.4408 (AISI 316)
3	Seat	NBR / EPDM
4	Pin	St. steel 1.4401 (AISI 304)
5	Stem	St. steel 1.4408 (AISI 316)

Specifications	
Flange Standart:	ISO 7005-2, JIS B2239
Top Flange:	ISO 5211
Face to face standard:	EN558, Series 20
Bonnet connection:	Bolted
Execution:	Straight
Connection type:	EN1092-1 / PN16
Operation:	Manual lever, Worm gear,
	Electric and pneumatic actuators

# BUTTERFLY VALVE TYPE LUG DIN PN 16

Материал EN-JL1030; DIN GGG40

Налягане PN 16

Размер DN-40-200

Specifications	
Actuation:	Quarter turn 90°
Tmax: [°C]	NBR seat: +90 °C
	EPDM seat: +130 °C

Dn	Press. rating	Connection	L	#e	ød	ødh	Thd. x n	ød2	ød3xøxn	#h	H	H1	Kg
40	PN 16	PN 16	33	11	147	110	M 16x4	90	70x9x4(F07)	19	113	66	2.1
50	PN 16	PN 16	43	11	161	125	M 16x4	90	70x9x4(F07)	19	118	71	3.5
65	PN 16	PN 16	46	11	185	145	M 16x4/(8)	90	70x9x4(F07)	19	126	80	4.4
80	PN 16	PN 16	46	11	196	160	M 16x8	90	70x9x4(F07)	19	133	88	5.5
100	PN 16	PN 16	52	11	226	180	M 16x8	90	70x9x4(F07)	19	147	106	7.4
125	PN 16	PN 16	56	14	260	210	M 16x8	90	70x9x4(F07)	19	160	118	10
150	PN 16	PN 16	56	14	290	240	M 20x8	90	70x9x4(F07)	19	180	140	13
200	PN 16	PN 16	60	17	356	295	M20x12	90	70x9x4(F07)	25	204	167	16