

## BUTTERFLY VALVE TYPE LUG JIS 10K

Материал EN-JL1030; DIN GGG40

Налягане 10 K

Размер DN 40 - 450

### APPLICATION

Soft seated, centric, lug type butterfly valve with one-piece stem. Vulcanized rubber liner by injection moulding. Top flange according to ISO 5211. Due to the meticulous vulcanization process of the lining, the valve can handle negative pressure (vacuum).

### MEDIA


Fuel oil, lubricating oil and flammable hydraulic oil.  
Cargo oil. Air. Gas. Non-flammable hydraulic fluid.  
Boiler feedwater, condensate. Seawater and freshwater.

### VARIANTS

- Disc in AISI316.
- Lining in EPDM or FPM/FKM.
- Other body materials on request.

### OPTIONS

- Manual lever.
- Worm gear.
- Electric or pneumatic actuators.

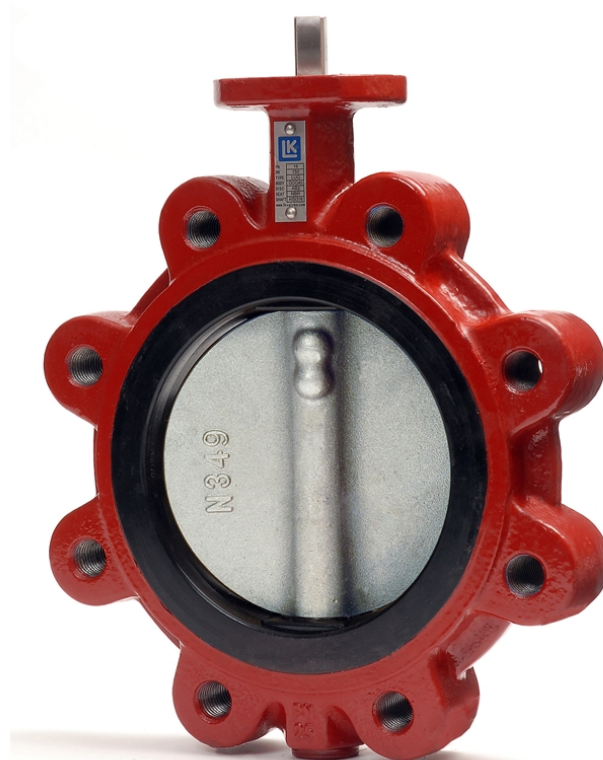

No.	Part	Material
1	Body	Nodular Iron EN-JL1030 (GGG40)
2	Disc	St. steel 1.4408 (AISI 316)
3	Seat	NBR / EPDM
4	Pin	St. steel 1.4401 (AISI 304)
5	Stem	St. steel 1.4408 (AISI 316)

Specifications	
Flange Standart:	ISO 7005-2, JIS B2239
Top Flange:	ISO 5211
Face to face standard:	EN558, Series 20
Execution:	Straight
Connection type:	Between flanges JIS B2220 5K
Operation:	Electric, Gear box, Lever, PNeumatic
Actuation:	Quarter turn
Tmax	NBR seat max. 90 °C EPDM seat 130 °C
MAX. Working pressure: 7 (BAR) AT °C -30°C - +95°C	

Dn	Pressure rating	Connection	L	#e	ød	ødh	Thd.x n	ød2	ød3xøxn	#h	H	H1	Kg
40	JIS 10K	10 K	33	11	147	105	M16x4	90	70x9x4(F07)	19	113	66	2.1
50	JIS 10K	10 K	43	11	161	120	M16x4	90	70x9x4(F07)	19	118	71	3.5

## BUTTERFLY VALVE TYPE LUG JIS 10K

Материал EN-JL1030; DIN GGG40

Налягане 10 K

Размер DN 40 - 450

Dn	Pressure rating	Connection	L	#e	ød	ødh	Thd.x n	ød2	ød3xøxn	#h	H	H1	Kg
65	JIS 10K	10 K	46	11	185	140	M16x4	90	70x9x4(F07)	19	126	80	4.4
80	JIS 10K	10 K	46	11	188	150	M16x8	90	70x9x4(F07)	19	133	88	5.5
100	JIS 10K	10 K	52	11	226	175	M16x8	90	70x9x4(F07)	19	147	106	7.4
125	JIS 10K	10 K	56	14	260	210	M20x8	90	70x9x4(F07)	19	160	118	10
150	JIS 10K	10 K	56	14	290	240	M20x8	90	70x9x4(F07)	19	180	140	13
200	JIS 10K	10 K	60	17	356	290	M20x12	90	70x9x4(F07)	25	204	167	16
250	JIS 10K	10 K	68	22	420	355	M20x12	125	102x12x4 (F10)	30	245	203	31
300	JIS 10K	10 K	78	22	478	400	M22x16	125	102x12x4 (F10)	30	270	228	43
350	JIS 10K	10 K	78	27	516	445	M22x16	150	125x14x4 (F12)	30	315	288	54
400	JIS 10K	10 K	102	27	581	510	M24x16	150	125x14x4 (F12)	30	350	305	84
450	JIS 10K	10 K	114	36	641	565	M24x20	175	140x18x4 (F14)	38	375	335	116