

CAST STEEL BALL VALVE THREADED 3 PARTS

• DIN PN 25

Материал steel 1.0619; DIN GS-C25

Налягане PN 25

Размер G 1 1/4" - 2 1/2"

DESCRIPTIONS

Ball valve is mainly used as shut off in liquid systems where it is a need for high flow. Quarterturn operation. Full bore. Three piece bolted. Top flange according to ISO 5211. Anti-static stem.

MEDIA


- Corrosive fluids. Fuel oil, lubricating oil and flammable hydraulic oil. Cargo oil. Air. Gas. Non-flammable hydraulic fluid.
- Boiler feedwater, condensate. Seawater and freshwater.

VARIANTS

Other materials on request.

OPTIONS

Relief hole on ball

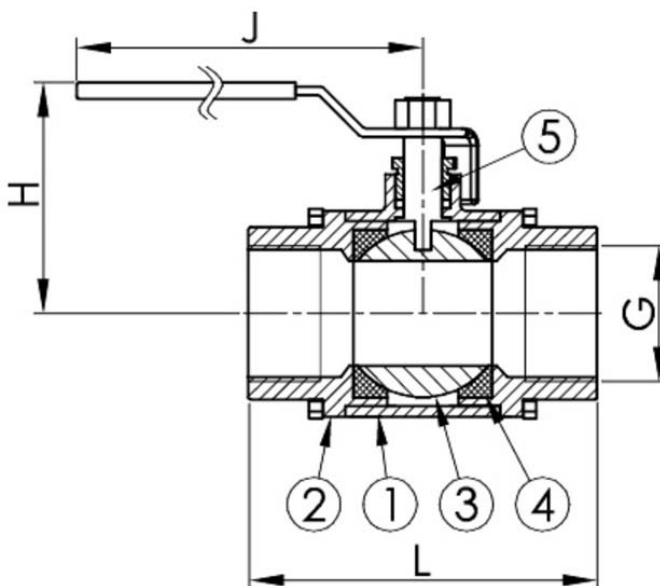

No.	Part	Material	Specifications	
1	Body	Carbon steel 1.0619; DIN GS-C25;	Standart:	DIN 3202 F1
2	Cap	Stainless steel 1.4408 (AISI316)	Connection standard:	ISO 228-1. BSPP
3	Ball	Stainless steel 1.4408 (AISI316)	Face to face standard:	EN558, Series 1
4	Seat	PTFE	Execution:	Straight
5	Stem	Stainless steel 1.4408 (AISI316)	Connection type:	Screwed
			Operation:	Lever
			Actuation:	quarterturn
			Tmax	120 °C

Dn	Pressure rating	Connection bsp	L	H	J	Weight (kg)
32	25	G 1 1/4"	110	83	155	1,8
40	25	G 1 1/2"	120	98	192	2,5
50	25	G 2"	140	105	192	3,7
65	25	G 2 1/2"	185	148	257	8,1