

FIRE FIGHTING VALVE STRAIGHT BRONZE JIS F7334 R WITH "NAKADJIMA" CONNECTION, 10K

Материал bronze CC491K; DIN RG5


Налягане 10 K

Размер DN 15 - 65

Media
Sea water and fresh water

APPLICATION

For fire fighting systems. Max. temperature 80C.

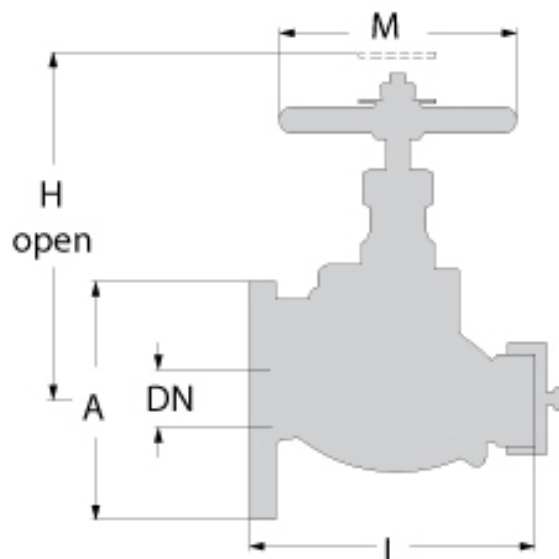

Dn	A	L	H (open)	M
15	80	110	130	80
25	95	125	160	125
DN	A	L	H (open)	M
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200

Specifications	
Standart:	JIS 7334R
Execution:	Straight
Connection type:	Flanged
Operation:	Manual / Handwheel
Actuation:	Multiturn
Tmax:	NBR seat mac 80 0C / EPDM seat 110 0C

**FIRE FIGHTING VALVE STRAIGHT BRONZE JIS
F7334 R WITH "NAKADJIMA" CONNECTION,
10K**

Материал bronze CC491K; DIN RG5

Налягане 10 K

Размер DN 15 - 65

Dn	A	L	H (open)	M
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200