

GLOBE VALVE CAST STEEL STRAIGHT JIS F7313

Материал steel GP240GH (GS-C25)

Налягане 20 К

Размер DN 32 - 200

DESCRIPTION

Globe valve straight type, flanged connection with shut off, screw down non return (SDNR) or regulating function. Metal sealing. Rising stem type.

MEDIA


- Steam. Fuel oil, lubricating oil and flammable hydraulic oil. Cargo oil. Air. Non-flammable hydraulic fluid. Boiler feedwater, condensate.
- Seawater and freshwater.

APPLICATIONS

- Applications include cooling water systems and steam systems.

VARIANTS AND ADVANTAGES

- Spring for SDNR

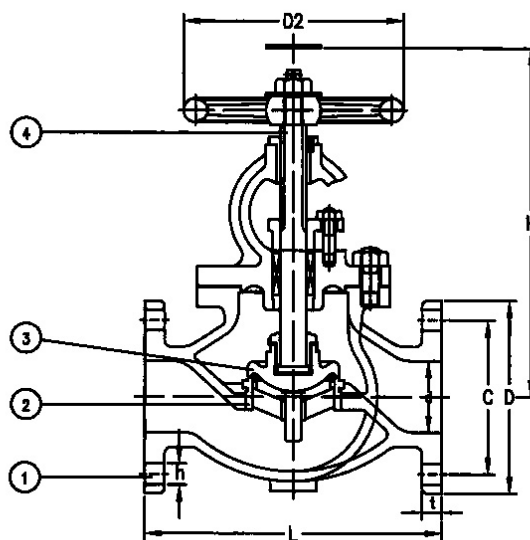

No.	Parts	Material
1	Body / Bonnet	Cast steel GP240GH (GSC25)
2	Seat	Stainless steel 1.4301
3	Disc	Stainless steel 1.4021
4	Stem	Stainless steel 1.4021
5	Handwheel	Cast iron (GG25)
6	Stem seal	Gland packing (Graphite)

Specifications	
Standart:	JIS F7400
Flange standard:	JIS B2220 20K
Face to face standard:	JIS B2002
Bonnet connection:	Bolted
Execution:	Straight
Connection type:	Flanged
Operation:	Handwheel / Rising stem
Actuation:	Multiturn
Tmax: [°C] at 29 Bars	300 °C

GLOBE VALVE CAST STEEL STRAIGHT JIS F7313

Материал steel GP240GH (GS-C25)

Налягане 20 К

Размер DN 32 - 200

Specifications	
Tmax: [°C] at 34 Bars	120 °C

Dn	Pressure rating	Connection	L	D	C	N x øh	H (open)	D2	Weight (kg)
32	20K	20K	190	135	100	4 x 19	270	140	14.4
40	20K	20K	200	140	105	4 x 19	290	160	16
50	20K	20K	230	155	120	8 x 19	305	160	21.6
65	20K	20K	270	175	140	8 x 19	345	180	30.4
80	20K	20K	300	200	160	8 x 23	385	200	43.5
100	20K	20K	350	225	185	8 x 23	440	225	62.3
125	20K	20K	430	270	225	8 x 25	500	250	94.8
150	20K	20K	500	305	260	12 x 25	550	300	132
200	20K	20K	560	350	305	12 x 25	630	400	204