

SAFETY VALVE BRONZE PROPORTIONAL THREADED HEROSE 06195

Материал bronze CC491K B 62 UNS C83600
 Налягане PN 25
 Размер DN 12 - 2

APPLICATION

Used as overflow valve for protection against excessive pressure in pipe systems and pressure vessels, which are not subject to approval.

OPERATION

Automatic pressure releasing valve which opens proportionally to the pressure increase. Constant balance between opening pressure and spring force gives small flow and minimal fluid loss on discharge.


MEDIA

Liquids, Gases

OPTIONS

Available options - on request only:

- stainless steel spring - material 1.4571
- external parts nickel plated

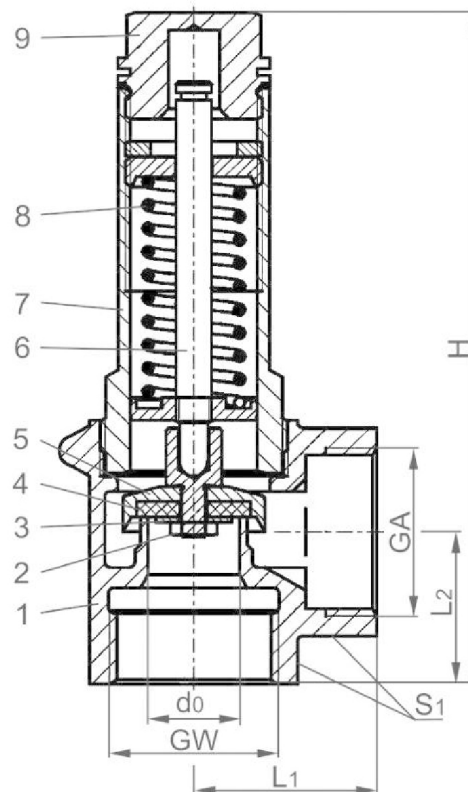

No.	Part	Material
1	Body	DIN - CC491K / ASTM - B 62 UNS C83600
2	Disc nut	CW614N / ASTM - B 249 UNS C38500
3	Plate	CW507L / ASTM - B 36 UNS C26800
4	Valve seal	NBR or FPM
5	Disc	CW614N / ASTM - B 249 UNS C38500
6	Stem	CW614N / ASTM - B 249 UNS C38500
7	Bonnet	CW614N / ASTM - B 249 UNS C38500
8	Spring	1.1200 / ASTM - A 227
9	Cap	CW614N / ASTM - B 249 UNS C38500

Specifications

SAFETY VALVE BRONZE PROPORTIONAL THREADED HEROSE 06195

Материал bronze CC491K B 62 UNS C83600

Налягане PN 25

Размер DN 12 - 2

Specifications	
Bonnet connection	Screwed
Execution	Angled
Connection type	Threaded female
Operation	Automatic
Working temperatures with NBR valve seal	
-10°C / +14°F (263K) up to +110°C / +230°F (383K)	
Working temperatures with FPM valve seal	
-10°C / +14°F (263K) up to +165°C / +329°F (438K)	

Dn	Oriface	Dim.code	Range	Outlet	Height	Lenght	Lenght	Spanner	Weight
Gw	D _o	.x.	Bar	Ga	H	L ₁	L ₂	S ₁	Kg
1/2"	12	0400	0.5-25	1/2"	90	25	20	27	0.21
3/4"	15	0600	0.2-20	3/4"	110	30	25	32	0.36
1"	18	1000	0.5-16	1"	130	36	30	41	0.65
1 1/4"	20	1200	0.5-16	1 1/4"	150	40	35	50	0.95
1 1/2"	24	1400	0.2-16	1 1/2"	170	48	40	58	1.5
2"	28	2000	0.2-16	2"	195	56	48	70	2.25

Discharge capacity													
P (set.)	Gw:	1/2	3/4	1	1-1/4	1-1/2	2	1/2	3/4	1	1-1/4	1-1/2	2
Bar (g)	D _o (mm):	12.0	15.0	18.0	20.0	24.0	28.0	12.0	15.0	18.0	20.0	24.0	28.0
	A _o (mm ²):	113.1	176.7	254.5	314.2	452.4	615.8	113.1	176.7	254.5	314.2	452.4	615.8
	Media:	Air in m ³ /h at 0 °c and 1013.25 mbar						Water in kg/h at 20 °c					
0.2		-	40	-	-	123	159	-	1330	-	-	5298	6525
0.5		47	63	117	158	208	277	1025	1881	3111	4832	7493	9227
1.0		68	89	172	230	306	407	1389	2547	4212	6542	10146	12494
2.0		113	139	284	386	505	660	1964	3603	5957	9252	14348	17670
3.0		156	192	389	527	692	906	2405	4412	7296	11332	17573	21641
4.0		196	241	488	661	869	1137	2778	5095	8424	13085	20292	24989
5.0		236	291	589	797	1048	1371	3105	5697	9419	14629	22687	27938
6.0		276	340	689	932	1225	1603	3402	6240	10318	16025	24852	30605
7.0		316	389	788	1067	1402	1835	3675	6740	11145	17310	26843	33057

**SAFETY VALVE BRONZE PROPORTIONAL
THREADED HEROSE 06195**

Материал bronze CC491K B 62 UNS C83600

Налягане PN 25

Размер DN 12 - 2

Discharge capacity													
P (set.)	Gw:	1/2	3/4	1	1-1/4	1-1/2	2	1/2	3/4	1	1-1/4	1-1/2	2
Bar (g)	D _o (mm):	12.0	15.0	18.0	20.0	24.0	28.0	12.0	15.0	18.0	20.0	24.0	28.0
	A _o (mm ²):	113.1	176.7	254.5	314.2	452.4	615.8	113.1	176.7	254.5	314.2	452.4	615.8
	Media:	Air in m ³ /h at 0 °c and 1013.25 mbar						Water in kg/h at 20 °c					
8.0		357	440	891	1205	1584	2073	3928	7206	11914	18505	28697	35340
9.0		398	489	990	1340	1761	2305	4167	7643	12637	19627	30438	37483
10.0		439	540	1093	1479	1943	2543	4392	8056	13320	20689	32084	39511
12.0		519	638	1293	1750	2298	3008	4811	8825	14592	22664	35146	43282
14.0		599	737	1493	2020	2654	3474	5197	9533	15761	24480	37962	46750
16.0		680	836	1693	2291	3010	3940	5556	10191	16849	26170	40584	49978
18.0		760	935	-	-	-	-	5893	10809	17871	-	-	-
20.0		849	1044	-	-	-	-	6211	11394	18838	-	-	-
22.0		930	-	-	-	-	-	6515	-	19757	-	-	-
25.0		1052	-	-	-	-	-	6945	-	21062	-	-	-

Discharge capacity is measured at fully open valve.