

# STORM VALVE CAST STEEL STRAIGHT FLANGED JIS F3059 10K

Материал steel 1.0619

Налягане 10 K

Размер DN-50-150

## APPLICATIONS


Discharge of sewage water. For vertical installation.

## VARIANTS

Other dimensions on request.

## MEDIA

Seawater and freshwater

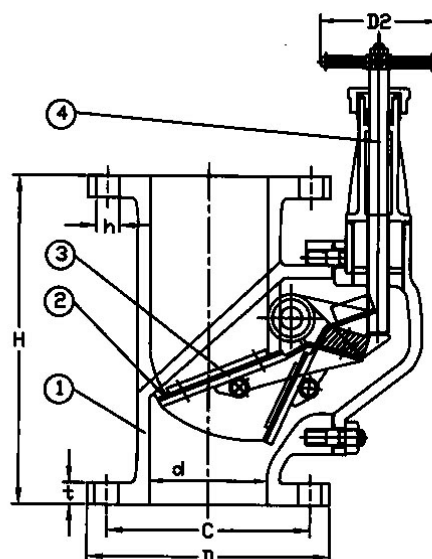

| No. | Parts | Material                   |
|-----|-------|----------------------------|
| 1   | Body  | Body - Cast Steel - 1.0619 |
| 2   | Seat  | Rubber NBR                 |
| 3   | Disc  | Bronze GR5                 |
| 4   | Pin   | Stainless steel 1.4301     |

## Specifications

|                    |               |
|--------------------|---------------|
| Standart:          | JIS F7400     |
| Flange standard:   | JIS B2220 10K |
| Bonnet connection: | Bolted        |
| Execution:         | Straight      |
| Connection type:   | Flanged       |
| Operation:         | Handwheel     |
| Actuation:         | Multiturn     |

| Dn | Pressure rating | Connection | H   | D   | C   | øh x holes | D2  | Weight (kg) |
|----|-----------------|------------|-----|-----|-----|------------|-----|-------------|
| 50 | 10 K            | 10 K       | 210 | 155 | 120 | 4 x 19     | 100 | 11.5        |
| 65 | 10 K            | 10 K       | 240 | 175 | 140 | 4 x 19     | 100 | 16.5        |
| 80 | 10 K            | 10 K       | 260 | 185 | 150 | 8 x 19     | 125 | 21.6        |

**STORM VALVE CAST STEEL STRAIGHT  
FLANGED JIS F3059 10K**

Материал steel 1.0619

Налягане 10 K

Размер DN-50-150

| <b>Dn</b> | <b>Pressure rating</b> | <b>Connection</b> | <b>H</b> | <b>D</b> | <b>C</b> | <b>øh x holes</b> | <b>D2</b> | <b>Weight (kg)</b> |
|-----------|------------------------|-------------------|----------|----------|----------|-------------------|-----------|--------------------|
| 100       | 10 K                   | 10 K              | 280      | 210      | 175      | 8 x 19            | 125       | 29.6               |
| 125       | 10 K                   | 10 K              | 330      | 250      | 210      | 8 x 23            | 125       | 43.6               |
| 150       | 10 K                   | 10 K              | 360      | 280      | 240      | 8 x 23            | 125       | 51.6               |