


# THERMODYNAMIC STEAM TRAP FLANGED TLV AF3N

Материал cast iron EN-JL1040

Налягане PN 16

Размер DN 15 - 25

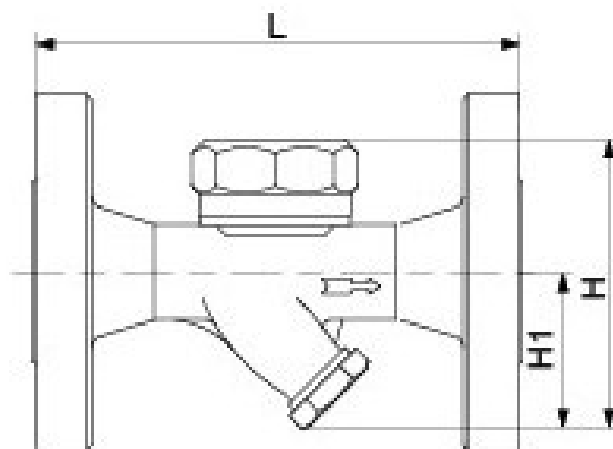

No.	Part	Material
1	Body	Cast Iron GG25
2	Internals	CF8M / 1.4408

Specifications	
Building standards:	DIN
Connection:	Flanged EN1092-1
Bonnet connection:	Screw bonnet
Execution:	Straight
Operation:	Automatic
Air release:	With automatic air release
Mounting:	Preffered horisontal

Max. working pressure (bar) °c		
+PMO - maximum operating pressure	13	[bar]
Minimum operating pressure	0.3	[bar]
TMO - maximum operating temperature	200	°C
Maximum back pressure	0.8	inlet presure

G	L	H	H1	Weight (kg)
15	175	120	67	3,4

**THERMODYNAMIC STEAM TRAP FLANGED TLV  
AF3N**

Материал cast iron EN-JL1040

Налягане PN 16

Размер DN 15 - 25

<b>G</b>	<b>L</b>	<b>H</b>	<b>H1</b>	<b>Weight (kg)</b>
20	191	125	71	5,0
25	211	131	73	6,2