

THREE-WAY STAINLESS STEEL BALL VALVE FLANGED • DIN PN 16

Материал stainless steel 1.4408

Налягане PN 16

Размер DN 25 - 100

APPLICATION

Three way ball valve of either L or T type. Full bore.


Corrosive fluids. Fuel oil, lubricating oil and flammable hydraulic oil. Cargo oil. Air. Gas. Non-flammable hydraulic fluid. Boiler feedwater, condensate. Seawater and freshwater.







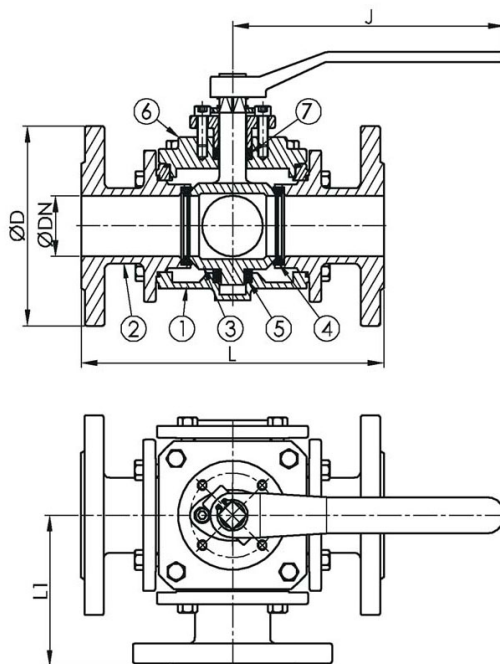

VARIANTS

Other materials on request.

OPTIONS

Relief hole on ball



Port Type	1	2	3	4
L				
T				

No.	Part	Material	Specifications	
1	Body	Stainless steel 1.4408 (AISI316)	Standart:	DIN 3202 F1
2	Cap	Stainless steel 1.4408 (AISI316)	Flange standard:	EN1092-2
3	Ball	Stainless steel 1.4408 (AISI316)	Face to face standard:	EN558, Series 1
4	Seat	PTFE	Execution:	Straight
5	Stem bearing	PTFE	Connection type:	Flanged
6	Top cap	Stainless steel 1.4408 (AISI316)	Operation:	Lever
7	Stem packing	PTFE	Actuation:	quterturn
			Tmax	180 °C

THREE-WAY STAINLESS STEEL BALL VALVE FLANGED • DIN PN 16

Материал stainless steel 1.4408

Налягане PN 16

Размер DN 25 - 100

L-port									
Dn	Pressure rating	Connection	L	D	P	N x d	H	J	Weight (kg)
25	16	16	225	115	85	4 x 14	112,5	170	10
40	16	16	242	150	110	4 x 18	121	172	15
50	16	16	250	165	125	4 x 18	125	225	22
65	16	16	285	185	145	8 x 18*	142,5	225	30
80	16	16	297	200	160	8 x 18	148,5	335	43
100	16	16	339	220	180	8 x 18	169,5	335	59
DN65 - n x d - 4 x 18									