

# FIRE FIGHTING VALVE ANGLE BRONZE JIS F7334 R WITH "NAKADJIMA" CONNECTION, 10K

Материал bronze CC491K; DIN RG5

Налягане 10 K


Размер DN 15 - 65

## Media

Sea water and fresh water

## APPLICATION

For fire fighting systems. Max. temperature 80C.

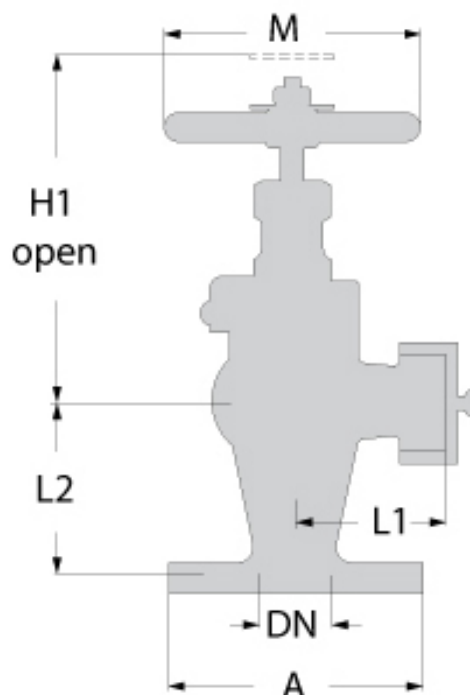

No.	Part	Material
1	Body	Bronze CC491K (RG5)
2	Disc ring	NBR bonded aramid
3	Disc	Bronze CC491K (RG5)
4	Bonnet	Bronze CC491K (RG5)
5	Stem	Special brass CW710R (SoMs59)
6	Handwheel	Cast Iron EN-JL1030

Specifications	
Standart:	JIS 7334H
Execution:	Angle
Connection type:	Flanged
Operation:	Manual / Handwheel

**FIRE FIGHTING VALVE ANGLE BRONZE JIS  
F7334 R WITH "NAKADJIMA" CONNECTION,  
10K**

Материал bronze CC491K; DIN RG5

Налягане 10 К

Размер DN 15 - 65

<b>Specifications</b>	
Actuation:	Multiturn
Tmax	NBR seat mac 80 0C / EPDM seat 110 0C

<b>Dn</b>	<b>A</b>	<b>L</b>	<b>H (open)</b>	<b>M</b>
15	95	55	120	80
25	125	65	145	125
40	140	75	165	140
50	155	105	255/240	160
65	175	120	255	200