

PRESSURE GAUGE CARBON STEEL PN 400

Материал steel 1.0619
 Налягане PN 400
 Размер G1/2" ; M20x1.5 M/F


APPLICATIONS

Pressure gauge needle valve. Closing valves towards pressure gauge.

The nipple is left below side for test connection

VARIANTS

Metric thread connection: M20x1,5
 Different body materials: Brass / Stainless steel

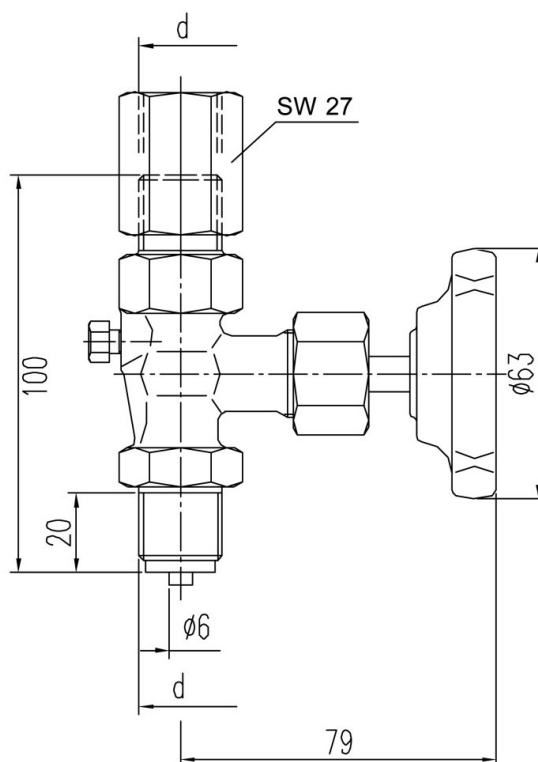

No.	Part	Material
1	Body	Steel 1.0619 / Forged
2	Primary spindle seal	PTFE
3	Spindle	Stainless1.4104/AISI 316L
4	Operating handwheel	Plastic
5	Tension socket	Steel 1.0460

Specifications	
Standart:	DIN
Max. Working Pressure [bar]:	400 Bar
Max. Working Temperature [°C]:	120 °C
Operating:	Manual
Weight:	0.490 kg
Connection 1:	Male thd. (BSPP)

PRESSURE GAUGE CARBON STEEL PN 400

Материал steel 1.0619

Налягане PN 400

Размер G1/2" ; M20x1.5 M/F

Specifications	
Connection 1 size:	1/2" (15)
Connection 2:	Female thd. (BSPP)
Connection 2 size:	1/2" (15)

Dn	Conn. thread.	Pressure range (bars)	Weight (kg)
15	BSPP G1/2"	0-400 Bars	0,490
15	M20x1,5	0-400 Bars	0,490