

# PRESSURE GAUGE CARBON STEEL WITH TEST CONNECTION PN 400



Материал steel 1.0619 / forged  
 Налягане PN 400  
 Размер G1/2" ; M20x1.5 M/F

## APPLICATIONS

Pressure gauge needle valve. Closing valves towards pressure gauge. The nipple is left below side for test connection

## VARIANTS

Metric thread connection: M20x1,5  
 Different body materials: Brass / Bronze / Stainless steel

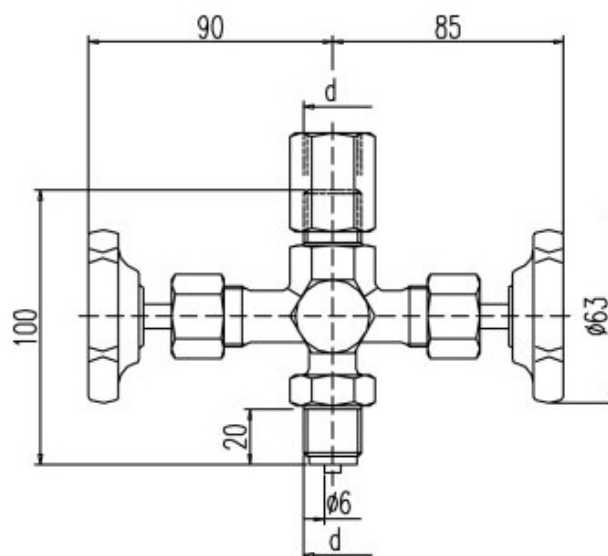

No.	Part	Material
1	Body	Carbon steel 1.0619 / Forged
2	Primary spindle seal	PTFE
3	Spindle	Stainless steel 1.4104 / AISI 316L
4	Operating handwheel	Plastic
5	Tension socket	Carbon steel 1.0460

Specifications	
Standart:	DIN
Max. Working Pressure [bar]:	400 Bar
Max. Working Temperature [°C]:	120 °C
Operating:	Manual handwheel

**PRESSURE GAUGE CARBON STEEL WITH TEST CONNECTION PN 400**

Материал steel 1.0619 / forged

Налягане PN 400

Размер G1/2" ; M20x1.5 M/F

<b>Specifications</b>	
Weight:	0.490 kg
Connection 1:	Male thread (BSPP)
Connection 1 size:	1/2" (15)
Connection 2:	Female thread (BSPP)
Connection 2 size:	1/2" (15)
Tension socket connection:	M20x1,5

<b>Dn</b>	<b>Thread bspp</b>	<b>Pressure range</b>	<b>Weight (kg)</b>
15	G1/2"	0-400,0 Bars	0,510
15	M20x1,5	0-400,0 Bars	0,510