

SEAMLESS STEEL BUTEWELD CAPS DIN2617

Материал steel P265GH , A234WPB

Налягане Pressure:

Размер DN 15 - 600

APPLICATIONS

Cap is an end blind piece with a specific diameter used to blind end of pipe of the same diameter.


VARIANTS

Other materials

- Ferritic
- Austenitic steels

Standards

- DIN 2617

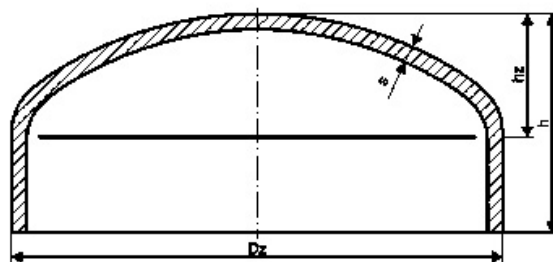

Material		
No.	Part	Material
1	Cap	Carbon steel P265GH / A234 Gr. WPB

Specifications	
Standart:	DIN 2617
Type:	Concentric

Nd	O.d.	Dimension	Walls thickness s mm dimension hz / weight kg											
			Type 2			Type 3			Type 4			Type 5		
Dn	Dz	H	S	Hz	Kg	S	Hz	Kg	S	Hz	Kg	S	Hz	Kg
15	21,3	25	-		-	2	6,2	0,06	3,2	6,6	0,1	4	6,9	0,13
20	26,9	25	-		-	2,3	7,7	0,08	3,2	8	0,11	4	8,3	0,14
25	33,7	38	-		-	2,6	9,5	0,09	3,2	9,8	0,13	4	10,1	0,15
32	42,4	38	-		-	2,6	11,8	0,1	3,6	12,1	0,14	4	12,3	0,16
40	48,3	38	-		-	2,6	13,3	0,2	4	13,8	0,22	5	14,1	0,23
50	60,3	38	-		-	2,9	16,4	0,28	4,5	17	0,3	5,6	17,4	0,33
65	76,1	38	-		-	2,9	20,5	0,34	5	21,2	0,5	7,1	22	0,71
80	88,9	51	-		-	3,2	23,8	0,53	5,6	24,7	0,67	8	25,6	0,96
100	114,3	64	-		-	3,6	30,5	1	6,3	31,4	1,5	8,8	32,4	1,72
125	139,7	76	-		-	4	37,1	1,14	6,3	37,9	1,6	10	39,3	2,86
150	168,3	89	4	44,4	1,63	4,5	44,6	2,65	7,1	45,5	3,55	11	46,9	5,3
200	219,1	102	4,5	57,5	2,86	6,3	58,2	5,5	8	58,8	6,7	12,5	60,4	10

SEAMLESS STEEL BUTEWELD CAPS DIN2617

Материал steel P265GH , A234WPB

Налягане Pressure:

Размер DN 15 - 600

Nd	O.d.	Dimension	Walls thickness s mm dimension hz / weight kg											
			Type 2			Type 3			Type 4			Type 5		
Dn	Dz	H	S	Hz	Kg	S	Hz	Kg	S	Hz	Kg	S	Hz	Kg
250	273	127	5	71,4	5	6,3	71,9	6,3	8,8	72,8	8,8	14,2	74,8	14,2
300	323,9	152	5,6	84,6	7,8	7,1	85,2	9,9	10	86,2	14	16	88,4	19,9
350	355,6	165	5,6	92,7	9,4	8	93,6	13,5	11	94,7	18,5	17,5	97,1	29,5
400	406,4	178	6,3	105,9	13,3	8,8	106,8	18,6	12,5	108,2	26,5	20	110,9	42,5
450	457	203	6,3	118,8	17	10	120,2	27	14,2	121,7	38,5	22,2	124,6	60
500	508,0	229	6,3	131,8	21,1	11	133,6	36,8	16	135,4	54	25	138,7	84
600	610	267	6,3	157,8	30	12,5	160,1	60	17,5	161,9	83	30	166,5	143